

# Automatic selection of clustering algorithms using supervised graph embedding

Noy Cohen-Shapira\*

*Ben-Gurion University of the Negev, Beer-Sheva, Israel*

Lior Rokach

*Ben-Gurion University of the Negev, Beer-Sheva, Israel*

---

## Abstract

The widespread adoption of machine learning (ML) techniques and the extensive expertise required to apply them have led to increased interest in automated ML solutions that reduce the need for human intervention. One of the main challenges in applying ML to previously unseen problems is algorithm selection - the identification of high-performing algorithm(s) for a given dataset, task, and evaluation measure. This study addresses the algorithm selection challenge for data clustering, a fundamental task in data mining that is aimed at grouping similar objects. We present MARCO-GE, a novel meta-learning approach for the automated recommendation of clustering algorithms. MARCO-GE first transforms datasets into graphs and then utilizes a graph convolutional neural network technique to extract their latent representation. Using the embedding representations obtained, MARCO-GE trains a ranking meta-model capable of accurately recommending top-performing algorithms for a new dataset and clustering evaluation measure. Extensive evaluation on 210 datasets, 13 clustering algorithms, and 10 clustering measures demonstrates the effectiveness of our approach and its dominance in terms of predictive and generalization performance over state-of-the-art clustering meta-learning approaches.

*Keywords:* Meta-learning, Algorithm selection, Clustering, AutoML, Algorithm ranking

---

## 1. Introduction

One of the most important unsupervised learning tasks, clustering is aimed at dividing a set of objects into groups of similar objects [1]. Clustering is widely used in many fields, such as image analysis, document categorization, bioinformatics, and customer segmentation [2, 3]. Although a large variety of clustering algorithms have been proposed, there are no

---

\*Corresponding author

*Email addresses:* noycohe@post.bgu.ac.il (Noy Cohen-Shapira), liorrk@post.bgu.ac.il (Lior Rokach)

guidelines or recommendations about selecting an appropriate algorithm for a given dataset and target evaluation measure. Thus, human expertise is often required to provide unique insights about the properties of a specific domain, as well as about the characteristics of the various algorithms and their configurations.

A key challenge in applying machine learning (ML) to a previously unseen dataset is algorithm selection. Algorithm selection is the task of identifying algorithms that are likely to produce the best performance on a given combination of dataset, task, and evaluation metric [4]. The difficulty in the algorithm selection task is due to the inherent characteristics of the dataset, including its size, the number of features and their composition, etc., which affect an algorithm’s performance. Moreover, the high computational cost of testing multiple configurations that include a large set of ML algorithms and their corresponding hyperparameters has driven the need to automate this process.

In recent years, multiple approaches have been proposed to address the automated machine learning (AutoML) procedure [5, 6]. The term AutoML is usually used to describe systems that aim to automate different aspects of the ML process. One AutoML approach suggested for dealing with the algorithm selection problem is meta-learning. Meta-learning methods seek to learn the relationship between the learning algorithm and dataset features, in order to identify the features that contribute to the improved performance of one algorithm over others [7]. While prior studies proposed meta-learning techniques for addressing algorithm selection for supervised tasks, such as classification [8, 9, 10], few studies have focused on unsupervised learning problems, particularly for clustering problems [11, 12, 13]. We argue that although existing state-of-the-art approaches based on predefined features are simple, they are not necessarily optimized for algorithm selection. The goal of this paper is to utilize a supervised graph embedding method, which aims to identify the optimal representation for algorithm selection.

We present MARCO-GE (Meta-learning Approach for Recommending Clustering algorithms by Graph Embedding), a novel supervised graph embedding meta-learning approach optimized for clustering algorithm selection. MARCO-GE first converts the interactions of the dataset’s instances into a graph. Next, a graph convolutional neural network technique is utilized in order to produce an embedding representation of the graph. This representation is then used to train a ranking meta-model capable of recommending high-performing algorithms for a previously unseen dataset and clustering evaluation measure. We will make the code of the MARCO-GE algorithm publicly available.<sup>1</sup>

To validate our method, we conduct a comprehensive evaluation on 210 datasets, 13 clustering algorithms, and 10 clustering evaluation measures. All of the measures are internal indices, namely, they assess the performance of the clustering algorithms without a priori knowledge about the clustering problem solution. Our experiments show that MARCO-GE outperforms other state-of-the-art meta-learning methods.

Our contributions in this study are as follows:

- We introduce an efficient and highly accurate meta-learning approach for the automated selection of clustering algorithms, using a graph convolutional neural network

---

<sup>1</sup>The code will be made available pending acceptance

technique, optimized for clustering algorithm selection, as a tool for dataset representation.

- We empirically demonstrate the merits of our approach on a large set of datasets that were analyzed by multiple clustering algorithms and clustering measures. Our results show that MARCO-GE significantly outperforms existing state-of-the-art approaches on the task of clustering algorithm selection.
- We demonstrate our method’s ability to consistently recommend high-performing algorithms, produce a high-quality recommendation list, and generate a more robust recommendation model; we also show that our model outperforms other leading methods.

The rest of the paper is arranged as follows. Section 2 presents an overview of the algorithm selection problem and several meta-learning approaches for clustering algorithm selection. In section 3, a simple popularity-based baseline is proposed, and MARCO-GE’s methodology is described. We outline the evaluation details in section 4 and discuss the experimental results and parameter sensitivity in section 5. In section 6, we conclude and highlight some directions for future work.

## 2. Related work

### 2.1. Algorithm selection using meta-learning

Selecting an algorithm that is likely to perform well on a given combination of dataset, task, and evaluation measure is one of the main challenges in ML. The problem of algorithm selection can be formulated as follows: given a set  $\mathbf{L} = \{L_1, \dots, L_n\}$  of learning algorithms, a dataset  $D$ , a task  $T$  (e.g., classification, clustering, etc.), and an evaluation measure  $M$ , the goal is to find an algorithm  $l^* \in L$  that minimizes or maximizes  $M$  [14].

The growing number of ML algorithms, as well as their hyperparameters, produces an exponential number of configuration combinations, which turns the algorithm selection process into a challenge that is difficult to address with brute-force search. One main approach for dealing with the time-consuming nature of testing multiple configurations is meta-learning. By learning about the behavior of ML algorithms and which attributes of a dataset contribute to the improved performance of one algorithm over others (i.e., meta-knowledge), meta-learning is capable of identifying high-performing algorithms for previously unseen datasets [7].

Considering the algorithm selection problem, each meta-example in the meta-knowledge represents an ML task that consists of: (1) dataset characteristics, called meta-features; and (2) information about the performance of algorithm(s) when applied to the dataset. Based on the meta-knowledge, a learning algorithm (i.e., a meta-learner) is trained and generates a meta-model. Then, given the meta-features of a new dataset, the meta-model is capable of recommending algorithm(s) for that dataset.

Since the dataset’s characterization is crucial for effectively learning the relationship between a dataset and an algorithm’s performance, it is important to produce significant

and meaningful meta-features. These meta-features can then be used to better identify similarities and differences among datasets. The meta-features proposed in prior research are commonly used for classification problems, and they are divided into three main categories: **1) Statistical and information-theoretic meta-features** are derived directly from the dataset [15]. These meta-features can describe simple information (e.g., number of instances in a dataset), statistical measures (e.g., mean, standard deviation) or information theory metrics (e.g., entropy).

**2) Model-based meta-features** describe the learning model to be applied on a given dataset, e.g., the number of leaf nodes or the depth of a decision tree [16].

**3) Landmarking meta-features** are generated by using the estimated performance of a simple learning algorithm on a given dataset for a quick performance assessment [17].

The creation of the meta-knowledge is followed by the training process discussed below. In most cases, the training process can be classified into two main tasks: classification and recommendation. While the classification task is concerned with learning the association of a single class value (i.e., one of the ML algorithms) with each instance, the recommendation task aims at generating a ranking of all of the possible ML candidates for each instance. In this work, we focus on the second task (i.e., recommendation). In the training process, a meta-learner is applied to the training set, i.e., to the meta-knowledge, and produces a meta-model. In the case of the recommendation task, given the meta-model and a new dataset, the meta-model generates a ranked list of algorithms, ordered by their predicted performance.

## 2.2. Clustering algorithm selection using meta-learning

While the majority of meta-learning techniques focus on selecting the best algorithm(s) for classification and regression tasks [15, 9], few studies are found in the literature for the clustering task. In the subsections that follow, we briefly present the techniques for evaluating the performance of clustering algorithms and discuss four studies addressing the clustering algorithm selection problem.

### 2.2.1. Clustering algorithm performance assessment

There are two main ways to assess the performance of clustering algorithms: external measures and internal measures. The fundamental difference between the two is whether the evaluation uses external knowledge or not. Internal measures are more appropriate for unsupervised tasks, particularly clustering, due to the fact that most of the relevant problems do not maintain a priori information about the solution. Several internal measures employ the idea of intra/inter-cluster measures. While intra-cluster measures assess the cluster’s compactness, inter-cluster measures evaluate the quality of the separation between clusters.

In the studies [12, 13], various internal measures were used to evaluate the performance of the clustering algorithms. A common approach for combining the individual values produced by the various measures is the *average ranking*. First, for each internal measure, the performance of the clustering algorithms is ranked. Then, the average ranking position over all of the internal indices is computed for each algorithm, such that the best algorithm holds the top ranked position, and the worst algorithm is in the last ranked position.

In this paper, we use the terms 'internal measures' and 'internal indices' interchangeably.

### 2.2.2. Clustering algorithm selection based on statistical meta-features

In de Souto et al. [11], the authors analyzed 32 microarray datasets that relate to cancer gene expression, using eight meta-features. These features are mainly descriptive statistical attributes. Seven clustering algorithms were applied to each of the datasets, and their performance was evaluated. Since the labels of the datasets in the study were already known (classification datasets), the algorithms were evaluated using an external measure (and therefore, a priori information). The proposed method focused on the problem of algorithm selection for gene expression data, thus some of their proposed features reflect that domain and are not relevant to all clustering problems.

### 2.2.3. Clustering algorithm selection based on evaluation meta-features

Another study on gene expression analysis proposed by [18] extended the statistical set of meta-features suggested in the previous work. The extended set of meta-features includes 19 meta-features, where five describe the characteristics of clustering algorithms, six are internal evaluation measures, and the others are the statistical features presented in [11]. So again, it can be seen that not all of the suggested meta-features can be applied to all clustering problems.

### 2.2.4. Clustering algorithm selection based on distance meta-features

Another study by Ferrari and de Castro [12] proposed distance-based meta-features for characterizing clustering problems. The authors built a vector  $\mathbf{d}$  which contains the Euclidean distance among all instances in a dataset:

$$\mathbf{d} = [d_{1,2}, \dots, d_{i,j}, \dots, d_{n-1,n}] \quad (1)$$

where  $n$  denotes the number of instances and  $d_{i,j}$  defines the Euclidean distance between the  $i$ -th and the  $j$ -th instances. Then, by normalizing the vector in the interval  $[0,1]$ , they extracted 19 meta-features from each dataset. We denote the normalized vector as  $\mathbf{d}'$ . Table 1 describes these meta-features. They evaluated their approach on 84 datasets from the UCI Machine Learning Repository [19] using seven clustering algorithms. The algorithms' performance was assessed based on 10 internal indices, without a priori knowledge.

Later in the paper, we refer to this approach as the distance-based method.

### 2.2.5. Clustering algorithm selection based on correlation and distance meta-features

Recently, a study by Pimentel and de Carvalho [13] proposed CaD, a new approach for characterizing a dataset. Their set of meta-features combines two measures: dissimilarity and correlation. While the former is based on the distance between instances, the latter represents the pairwise interactions of two instances. The distance-based meta-features were computed using the Euclidean distance among all of the instances, as described in [12]. As a result, a vector  $\mathbf{d}$  is created. Using the Spearman's rank correlation coefficient, an additional vector  $\mathbf{c}$  containing the correlation among instances is generated:

Meta-feature	Description
$MF_1$	Mean of $\mathbf{d}'$
$MF_2$	Variance of $\mathbf{d}'$
$MF_3$	Standard of deviation of $\mathbf{d}'$
$MF_4$	Skewness of $\mathbf{d}'$
$MF_5$	Kurtosis of $\mathbf{d}'$
$MF_6$	% of values in the interval $[0, 0.1]$
$MF_7$	% of values in the interval $(0.1, 0.2]$
$MF_8$	% of values in the interval $(0.2, 0.3]$
$MF_9$	% of values in the interval $(0.3, 0.4]$
$MF_{10}$	% of values in the interval $(0.4, 0.5]$
$MF_{11}$	% of values in the interval $(0.5, 0.6]$
$MF_{12}$	% of values in the interval $(0.6, 0.7]$
$MF_{13}$	% of values in the interval $(0.7, 0.8]$
$MF_{14}$	% of values in the interval $(0.8, 0.9]$
$MF_{15}$	% of values in the interval $(0.9, 1]$
$MF_{16}$	% of values with absolute z-score in the interval $[0, 1)$
$MF_{17}$	% of values with absolute z-score in the interval $[1, 2)$
$MF_{18}$	% of values with absolute z-score in the interval $[2, 3)$
$MF_{19}$	% of values with absolute z-score in the interval $[3, \infty)$

Table 1: Distance-based meta-features and their description.

$$\mathbf{c} = [c_{1,2}, \dots, c_{a,b}, \dots, c_{n-1,n}] \quad (2)$$

where  $n$  denotes the number of instances and  $c_{i,j}$  defines the correlation between the  $i$ -th and the  $j$ -th instances. Next, the vectors  $\mathbf{c}$  and  $\mathbf{d}$  are concatenated to a new vector  $\mathbf{m}$ . Then, by normalizing the vector  $\mathbf{m}$  in the range  $[0,1]$ , the meta-features described in Table 1 are extracted. The authors conducted a comprehensive evaluation including more clustering algorithms and a larger number of datasets than the previous studies mentioned above.

Despite the novelty, simplicity, and satisfactory results demonstrated in the studies described above, we believe that further enhancements are needed, and our proposed method improves upon the existing methods in three main areas.

The first area of improvement addresses the computation of multivariate measures (e.g., similarity, distance, etc.) between instances. High-dimensional data are now widely used in different applications. Usually, multidimensional datasets include some noisy, redundant, or uninformative features. Thus, using all of the features as a basis for meta-feature generation can produce misleading results. To resolve this problem, we utilize a dimensionality reduction technique. Our method generates the meta-features based on the reduced representation of the instances so that their significant and latent essence is captured.

Furthermore, the studies [12, 13] described above produce a meta-model based on the combination of multiple internal clustering measures. We extend this research by producing

a meta-model both for multiple measures and for an individual measure - a model for every internal index; thus, the meta-model can focus on optimizing a specific clustering measure.

The last area to be considered is the characteristics of the meta-features. The meta-features in the abovementioned studies largely depend on the interactions exposed (i.e., similarity or dissimilarity) among the instances. By constructing a similarity graph, we are able to reveal latent relationships, which can then be used as meta-features

Graphs are widely used for modeling entity interactions in many domains, including social and biological networks [20]. In recent years, several convolutional neural network architectures have been proposed to address a large class of graph-based learning problems, including learning graph representation [21, 22]. These architectures seek to learn a continuous vector representation  $z \in \mathbb{R}^d$  for a given graph  $G$ . Since graphs naturally embody interconnectivity between data points, we propose using novel graphical embedded meta-features to address the clustering algorithm selection challenge.

Table 2 summarizes the main properties related to the studies reviewed and the contribution of our work toward the advancement of research in this area. We compare the meta-learning approaches in terms of the number of datasets used for training a meta-model, number of clustering algorithms evaluated, number of clustering algorithm categories (e.g., partitional algorithms, hierarchical approaches, etc.), and the number of internal measures that are applied to assess the performance of the clustering algorithm. We can conclude that based on most of these criteria, our method excels.

Papers	de Souto et al. [11]	Vukicevic et al. [18]	Distance-based [12]	CaD [13]	<b>This study</b>
Number of datasets	32	30	84	219	210
Number of clustering algorithms	7	7	7	10	13
Number of algorithm categories	4	2	5	4	6
Number of clustering internal measures	0	0	10	10	10

Table 2: A comparison of approaches for clustering algorithm selection using meta-learning.

### 3. Methods

At the beginning of this section, we introduce a simple new popularity-based baseline which is capable of recommending suitable algorithms for a given measure, without additional significant computational effort for new datasets. Then, we present MARCO-GE, a novel meta-learning approach for clustering algorithm selection that achieves state-of-the-art results.

#### 3.1. Popularity-based baseline

We suggest a new simple, yet effective, baseline method based on popularity for algorithm selection. Usually, a popularity-based approach is used as a strong baseline in ranking tasks such as recommendation systems [23, 24].

Given a set of clustering algorithms  $L$ , two steps are involved in the popularity-based baseline’s preprocessing. First, for each clustering measure  $m_i$ , we count the number of times that each algorithm  $l \in L$  obtained the best performance across the dataset collection

(as explained below in subsection 3.3.1). We denote this score as  $l_{m_i-\#top}$ . Then, a rank is assigned to every algorithm based on its score  $l_{m_i-\#top}$ . As a result, for each clustering index  $m_i$ , a ranked vector  $W_{m_i}$  represents the popularity of the algorithms generated. The algorithms are ranked in ascending order, such that the most frequent algorithm (i.e., the algorithm that most frequently obtained the best performance) holds the first rank position.

Then, given a previously unseen dataset  $d_{new}$  and a measure  $m_i$  preferred by the user, the popularity-based approach provides the vector  $W_{m_i}$ . The vector  $W_{m_i}$  is precalculated, and therefore no additional computational effort is required for a new dataset.

To illustrate how the popularity-based baseline works, consider a case in which the following algorithms are examined: evolutionary algorithm for clustering (EAC), particle swarm optimization for clustering (PSC), minimum spanning tree (MST), agglomerative single-linkage (SL), agglomerative average-linkage (AL), agglomerative complete-linkage (CL), agglomerative Ward-linkage (WL), K-means (KM), K-harmonic means (KHM), kernel K-means (KKM), mini batch K-means (MBK), fuzzy C-means (FC), and density-based spatial clustering applications with noise (DBSCAN); these algorithms are described in more detail in subsection 4.3.1. The rows in Table 3 present how many times each algorithm held the first rank position. For example, if the selected measure is the Dunn index, then the SL algorithm gets the first rank position, followed by AL, EAC, DBSCAN, CL, MST, KM, KHM, FC, KKM, MBK, PSC, and WL, respectively. Table 4 shows the three top-performing algorithms for each clustering internal measure.

Index	EAC	PSC	MST	SL	AL	CL	WL	KM	KHM	KKM	MBK	FC	DBSCAN
Bezdek-Pal	32	1	18	<b>111</b>	33	2	1	1	1	0	0	3	8
Dunn Index	39	0	11	<b>59</b>	47	13	0	10	7	2	1	3	18
Calinski-Harabasz	22	2	0	4	4	1	21	<b>130</b>	13	1	0	10	2
Silhouette Score	24	6	2	40	<b>55</b>	6	12	53	4	2	3	0	3
Milligan-Cooper	<b>57</b>	16	8	23	30	6	11	31	1	2	2	3	20
Davies-Bouldin	8	0	7	<b>91</b>	66	3	5	21	4	0	2	1	2
Handl-Knowles-Kell	7	14	38	<b>124</b>	9	1	5	6	0	0	0	0	6
Hubert-Levin	<b>47</b>	5	14	41	46	7	5	27	3	2	0	0	13
SD-Scat	3	1	17	29	51	9	15	4	4	1	0	5	<b>71</b>
Xie-Beni	2	0	39	<b>63</b>	61	8	3	0	0	2	2	1	29
Average ranking	28	7	5	29	<b>79</b>	14	8	33	3	2	2	0	0

Table 3: Number of times that each algorithm achieved the highest performance for each of the clustering internal measures, over 210 datasets. The most frequent algorithm for each internal measure is highlighted.

### 3.2. MARCO-GE method

MARCO-GE is a meta-learning framework for ranking the performance of clustering algorithms for a given combination of dataset and clustering evaluation measure. MARCO-GE consists of two phases: training and inference. During the training phase, we evaluate and rank the clustering algorithms, analyze multiple datasets, generate meta-features, and train a ranking meta-model. During the inference phase, the meta-model generated in the training phase is used to produce a ranked list of promising clustering algorithms for a new dataset and clustering metric.

Index	Top-1	Top-2	Top-3
Bezdek-Pal	SL	AL	MST
Dunn Index	SL	AL	EAC
Calinski-Harabasz	KM	EAC	WL
Silhouette Score	AL	KM	SL
Milligan-Cooper	EAC	KM	AL
Davies-Bouldin	SL	AL	KM
Handl-Knowles-Kell	SL	MST	PSC
Hubert-Levin	EAC	AL	SL
SD-Scat	DBSCAN	AL	SL
Xie-Beni	SL	AL	MST
Average ranking	AL	KM	SL

Table 4: The three top-performing algorithms for the various clustering internal measures.

### 3.3. The training phase

During the training phase, we evaluate clustering algorithms on a large collection of diverse datasets. Then, we generate meta-features that are used to train a meta-model. The entire training phase is illustrated in Figure 1 and includes four steps; this is followed by a description of each step.

#### 3.3.1. Clustering algorithm evaluation

In this step (step one), in order to quantify the quality of the obtained solution for each clustering algorithm on every dataset, the following process is used:

1. Given a collection of datasets  $D$ , a set of clustering algorithms  $L$ , and an internal index  $m_i$ , we quantify the performance of all combinations of  $d_j \in D$  and  $l_a \in L$  using  $m_i$ . We denote the result of this evaluation as  $P_{l_a, d_j, m_i}$ . Based on the performance, we rank the clustering algorithms for each dataset, such that the algorithm with the best performance occupies the first rank position, and the algorithm with the worst performance holds the last position. The ranking of each algorithm is defined as  $R_{l_a, d_j, m_i}$ .
2. For each  $d_j \in D$ , we select the algorithm which is responsible for the best performance achieved given the index  $m_i$ . We refer to this value as  $R_{d_j\_best, m_i}$ .
3. We generate the pair  $(d_j, R_{d_j\_best, m_i})$  and consider the second entry as a label for dataset  $d_j$ .

It is important to make the following two points regarding step one. First, to deal with the non-deterministic nature of some algorithms in  $L$ , we repeat this assessment 10 times and compute the average results; thus, the result  $P_{l_a, d_j, m_i}$  is computed based on the average performance score of algorithm  $l_a$  on  $d_j$ , using  $m_i$ . Second, the individual internal index mentioned in Figure 1 can be replaced by computing the average ranking score of each clustering algorithm’s performance based on multiple internal measures (see subsection 2.2.1 for more details).

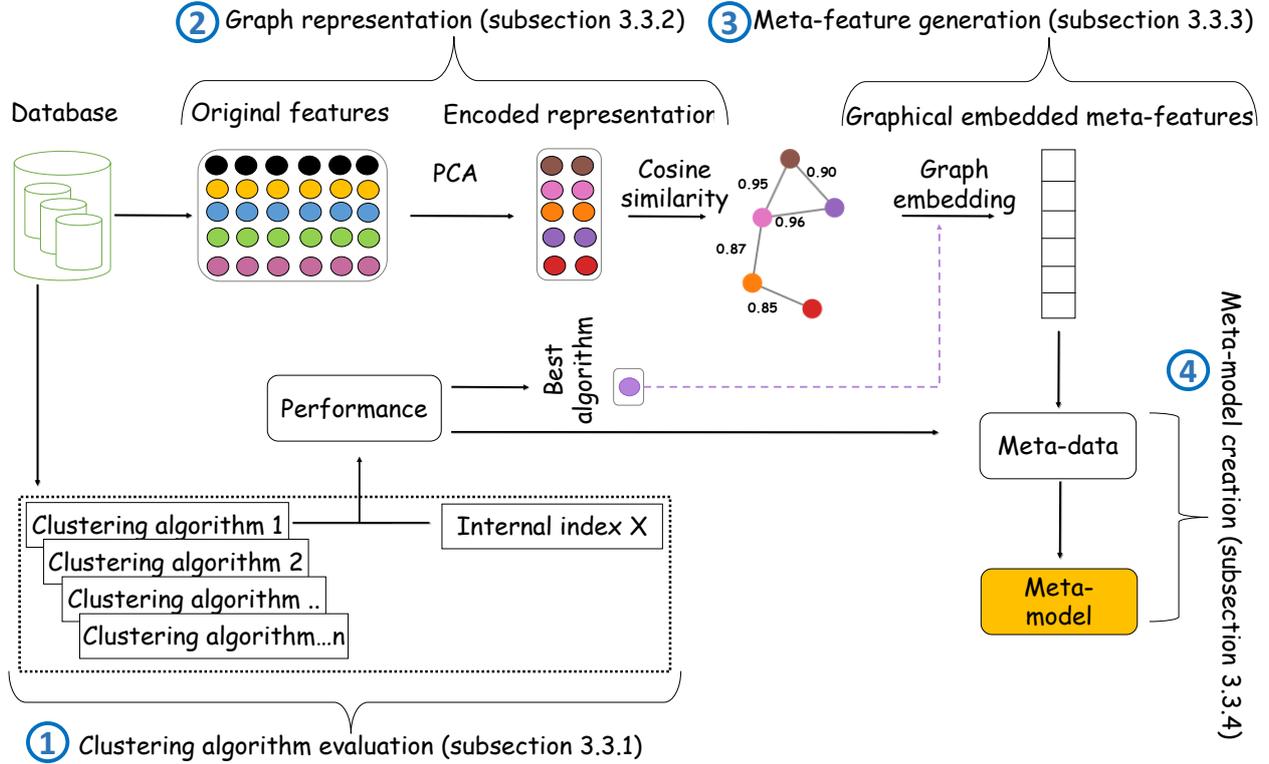


Figure 1: The training phase - The MARCO-GE workflow starts with a collection of datasets. The clustering algorithms are then evaluated on the datasets using an internal measure (step #1). During the graph representation step, the PCA algorithm is applied, and a weighted graph is constructed (step #2). Then, the graph is transformed into a lower-dimensional space (step #3). Finally, a meta-model capable of recommending high-performing algorithms for previously unseen datasets is created (step #4).

### 3.3.2. Graph representation

The principal goal of step two is to generate graphical representations of the datasets. We first describe our motivation, and then we demonstrate the entire process.

Our study is based on the intuition that similar types of datasets are likely to induce similar performance from clustering algorithms, thus if a given clustering algorithm is effective for a dataset it will likely also be well-suited for similar datasets. We further expect that the performance of the given clustering algorithm  $l_i$  on dataset  $d_j$  - given by  $p(d_j, l_i)$  - is mainly influenced by the pairwise connections between the instances of a dataset. Thus, by modeling these interactions in a graph and creating embedding representations (i.e., our meta-features) that capture their essence, we will be able to infer dataset similarity in terms of the algorithm performance. Formally, given a function  $g$ , which receives a dataset as input and returns its embedding, we assume that if  $g(d_1) \approx g(d_2)$ , then  $p(g(d_1), l_i) \approx p(g(d_2), l_i)$ .

As known, given a set of data points  $x_1, \dots, x_n$  and pairwise similarities, clustering algorithms seek to expose the intrinsic sub-classes in the data by grouping the data into clusters so that data points within a cluster are more similar to each other than to those outside the cluster.

Since graphs naturally embody the notions of local neighborhood interactions as well as global properties, the translation of the datasets into graphs is quite direct. Applying a graph-based method to extract informative meta-features that can quantify dataset similarity enables us to recommend a suitable algorithm for a new dataset.

To obtain the representation of the dataset’s interactions, we adopt the following procedure: First, every dataset undergoes preprocessing, which includes the following steps:

- (a) Removing the class/label column
- (b) Encoding the nominal attributes into numeric values
- (c) Removing features with identical values for all of the instances
- (d) Removing features with a distinct value for each instance
- (e) Removing features with more than 40% NaN values
- (f) Normalizing all features in the range [0,1]

Then, we apply a dimensionality reduction technique. Dimensionality reduction is the mapping of high-dimensional data into a meaningful reduced representation [25]. In this paper, we apply the principal components analysis (PCA) method [26] with low information loss. One of the most important linear dimensionality reduction techniques, PCA is defined as an orthogonal linear transformation that converts the data into a lower-dimensional space by identifying the dimensions with the largest variance.

Next, inspired by [27], we construct a *similarity graph*  $G = (V, E)$  to represent the local characteristics of the data. A similarity graph is an undirected and weighted graph that is based on the cosine similarity measure. In a similarity graph, each vertex  $v_i \in V$  corresponds to an instance  $x_i$ , and two vertices are connected via an edge if the similarity  $s_{i,j}$  between the corresponding instances  $x_i$  and  $x_j$  is larger than a certain threshold (we set the threshold value to 0.9). The computation of  $s_{i,j}$  is based on the reduced representation of  $x_i$  and  $x_j$ , and the result determines the weight of the edge  $e = (i, j) \in E$ .

### 3.3.3. Meta-feature generation

During step three, given a graph  $G$ , we utilize a graph convolutional neural network (GCNN) technique to generate its embedding representation. Motivated by the success of convolutional neural networks (CNNs) in computer vision, numerous studies extended those methods to graph data [28]. In this study, we incorporate both the graph structure and the graph label into an embedding representation using a supervised GCNN model. We stack multiple graph convolutional layers with a readout layer, such that the graph convolutional layers are responsible for extracting high-level node representations, whereas the readout layer aggregates node representations into a graph representation.

**Definition:** Given a set of labeled graphs  $GL = \{(G_1, l_1), \dots, (G_n, l_n)\}$ , our goal is to learn a function  $f : G_i \rightarrow \mathbb{R}^d$ , such that  $\max(\text{softmax}(f(G_i))) = l_i \in L$ , and  $L$  is the set of graphs labels.

Each graph  $G_i = (V, A, D, X)$  is comprised of: (1) a set  $V$  consisting of nodes  $\{v_1, \dots, v_n\}$ , (2) an adjacency matrix  $A \in \mathbb{R}^{n \times n}$  where  $a_{ij}$  denotes the edge weight between the vertices  $v_i$  and  $v_j$ , (3) a degree matrix  $D$ , and (4) a node feature vector matrix  $X \in \mathbb{R}^{n \times d}$ . Each graph  $G_i$  also has a corresponding label  $l_i$ .

According to a study by Kipf and Welling [29], each graph convolution layer is defined as follows:

$$H^{(l+1)} = \sigma(FH^{(l)}W^{(l)}) \quad (3)$$

where  $F = \tilde{D}^{-\frac{1}{2}}\tilde{A}\tilde{D}^{-\frac{1}{2}}$  is the normalized adjacency matrix with added self-loops,  $W^{(l)}$  is a layer-specific weight matrix,  $\sigma(\cdot)$  is an activation function (e.g., ReLU), and  $H^{(l)}$  denotes the node representation matrix in the  $l^{th}$  layer;  $H^{(0)} = X$ .

Here, the set of graph labels  $L$ , consists of the clustering algorithms described in subsection 4.3.1. Now, given an internal measure  $m_i$ , the corresponding label for dataset  $d_j \in D$  which is modeled by  $G_j$  is  $R_{d_j\_best, m_i}$  (see subsection 3.3.1). In addition,  $X$  is defined using the DeepWalk framework for weighted graphs. DeepWalk is an effective empirical method for learning a fixed-size embedding representation [30] for each vertex in a graph. Given a graph  $G = (V, E)$  with attributes  $S \in \mathbb{R}^{|V| \times b}$  where  $b$  is the size of the feature space, DeepWalk generates  $X \in \mathbb{R}^{|V| \times d}$ , such that  $d \ll b$ . In our study,  $S$  represents the reduced feature matrix obtained from the PCA procedure. The method’s ability to capture the graph topology, along with the fact that  $d$  is a predetermined parameter, enable us to create an enhanced GCNN model with fixed-size feature dimensions.

Algorithm 1 summarizes the *meta-feature generation* step.

---

**Algorithm 1** Meta-feature generation(MFG)

---

```

1: procedure MFG(Measure  $m_i$ ,  $GL = \{(G_1, R_{d_1\_best, m_i}), \dots, (G_n, R_{d_n\_best, m_i})\}$ ,  $SS = \{S_1, \dots, S_n\}$ )
2:    $X \leftarrow \emptyset$ 
3:   for each  $S_i$  in  $SS$  do
4:      $X_{new} \leftarrow \mathbf{WeightedDeepWalk}(S_i)$ 
5:      $X \leftarrow X \cup X_{new}$ 
6:    $GCNN\_model \leftarrow \mathbf{CreateGCNN\_model}(GL, X)$ 
7:    $MetaFeatures\_set \leftarrow GCNN\_model.\mathbf{getAllEmbeddings}()$ 
8:   return  $MetaFeatures\_set$ 

```

---

### 3.3.4. Meta-model creation

The key idea of this work is to produce an enriched meta-model (step 4) capable of recommending the top-performing clustering algorithm(s) for a combination of an unseen dataset and clustering evaluation measure.

To train a ranking model that optimizes a clustering evaluation metric  $m_i$ , we collected a large labeled training set. For each combination of  $d_j \in D$  and  $l_a \in L$  (as mentioned,  $D$  and  $L$  are respectively collections of datasets and clustering algorithms), we create a training instance  $\mathbf{t}$  that includes the following information:

1.  $M_{d_j, m_i}$  - the set of meta-features generated in the *meta-feature generation* step (explained in subsection 3.3.3)
2.  $M_{l_a}$  - a single discrete feature describing  $l_a$

3.  $R_{l_m, d_j, m_i}$  - the rank obtained by algorithm  $l_a$  for dataset  $d_j$  using  $m_i$  (see subsection 3.3.1 for more details)

Eventually,  $t = \{M_{d_j, m_i} \cup M_{l_a} \cup R_{l_a, d_j, m_i}\}$ .

Next, we use the ranking version of the XGBoost algorithm [31] as a meta-learner, since prior research [9] showed that XGBoost is well suited for producing a list of promising candidates. Once the meta-model has been trained, predictions for previously unseen datasets can be made. The *meta-model creation* step is summarized in Algorithm 2.

---

**Algorithm 2** Meta-model creation

---

```

1: procedure CREATEMODEL(Measure  $m_i$ ,  $GL = \{(G_1, R_{d_1\_best, m_i}), \dots, (G_n, R_{d_n\_best, m_i})\}$ ,
   SS =  $\{S_1, \dots, S_n\}$ , algorithms  $L$ , datasets  $D$ )
2:    $MetaFeatures\_set \leftarrow \text{MPG}(m_i, GL, SS)$  ▷ See Algorithm 1
3:    $training\_set \leftarrow \emptyset$ 
4:   for each  $d_j$  in  $D$  do
5:      $M_{d_j, m_i} \leftarrow MetaFeatures\_set.\text{GetMetaFeatures}(d_j)$ 
6:      $P_{d_j, m_i} \leftarrow \text{EvaluatePerformance}(d_j, L, m_i)$ 
7:     for each  $l_a$  in  $L$  do
8:        $M_{l_a} \leftarrow \text{GetDiscreteFeature}(l_a)$ 
9:        $R_{l_a, d_j, m_i} \leftarrow P_{d_j, m_i}.\text{GetRanking}(l_a)$ 
10:       $current\_features \leftarrow (M_{d_j, m_i} \cup M_{l_a} \cup R_{l_a, d_j, m_i})$ 
11:       $training\_set \leftarrow (training\_set \cup current\_features)$ 
12:    $RankingMetaModel \leftarrow \text{XGBoost}(training\_set)$ 
13:   return  $RankingMetaModel$ 

```

---

### 3.4. The inference phase

During the inference phase, we select a trained meta-model based on the clustering measure preferred by the user and generate a list of clustering algorithms, sorted by their predicted performance on a new dataset  $d_{test}$ .

This phase is described in Figure 2 and consists of three steps:

1. We generate a graph  $G_{test}$  which models  $d_{test}$  by following the process described in subsection 3.3.2.
2. Given  $G_{test}$ , a set of meta-features  $M_{test}$  are created (see subsection 3.3.3).
3. For each  $l_a \in L$ , we generate  $M_{l_a}$  (i.e., a nominal feature describing  $l$ ) and create the joint meta-feature vector  $\{M_{test} \cup M_{l_a}\}$ . Then, based on all of the meta-feature vectors, the XGBoost trained meta-model produces a list of all clustering algorithms in  $L$ , ranked by their predicted performance.

## 4. Evaluation

To assess our method as a meta-learning approach that addresses the task of recommending the appropriate algorithm for a given dataset and evaluation measure, two different modes were evaluated: the average ranking model mode and the individual model

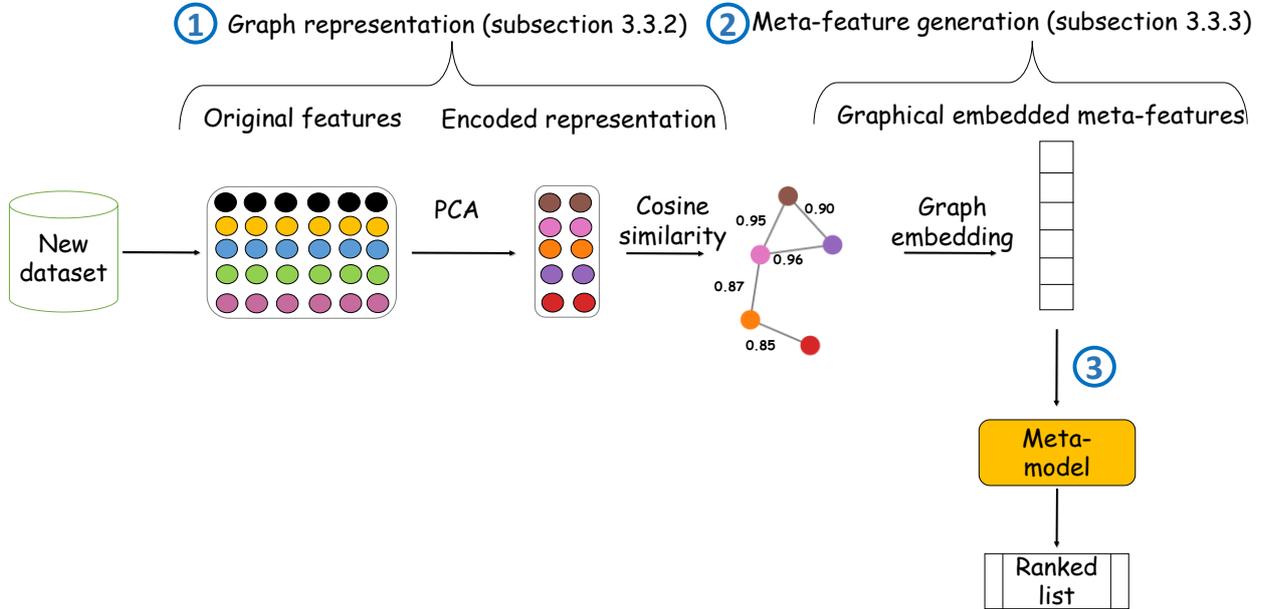


Figure 2: The inference phase - given the meta-features of a previously unseen dataset, MARCO-GE selects a trained meta-model according to the clustering index preferred by the user. Then, MARCO-GE produces a ranked list of clustering algorithms.

mode. As described below, we conducted an extensive evaluation with 210 datasets, 13 clustering algorithms, and 10 internal clustering measures. The two state-of-the-art methods [13] are compared to MARCO-GE using the following measures: mean reciprocal rank and Spearman’s rank correlation coefficient.

#### 4.1. Evaluation modes

We evaluated MARCO-GE with two different modes:

1. **Average ranking model mode** - In this mode, 10 diverse clustering internal measures are combined to evaluate the clustering algorithms’ performance on the different datasets. For each dataset and clustering algorithm, 10 different estimations were produced (by the 10 different indices). To merge them, we used the *average ranking* combination technique which has been used in previous studies [12, 13]. First, for each internal measure, the performance of the 13 clustering algorithms is ranked. Then, the mean position value for each algorithm on all indices is computed. As a result, the best algorithm is in the first rank position while the worst algorithm occupies the last rank position.
2. **Individual model mode** - In this mode, the solutions of the clustering algorithms are ranked by a particular internal measure. A unique ranking meta-model is built for

each of the 10 internal indices. In total, 10 different meta-models were built, each of which optimizes a specific clustering measure.

#### 4.2. Datasets

We conduct our experiments on 210 datasets,<sup>2</sup> all of which are available in the following online repositories: Kaggle,<sup>3</sup> KEEL,<sup>4</sup> OpenML,<sup>5</sup> and UCI.<sup>6</sup> These datasets cover a wide range of domains (e.g., medicine, natural science, etc.) and are quite varied with respect to their size, the number of features, and their composition. Figure 3 shows the dimensions of the datasets.

Three sets of meta-features were extracted from each dataset: **(a)** distance-based features [12], **(b)** correlation and distance-based features, denoted as CaD [13], **(c)** graphical embedded-based features. The first two, which were used in prior studies, are described in subsections 2.2.4 and 2.2.5, respectively, while the latter, which is proposed in this study, is described in subsection 3.2.

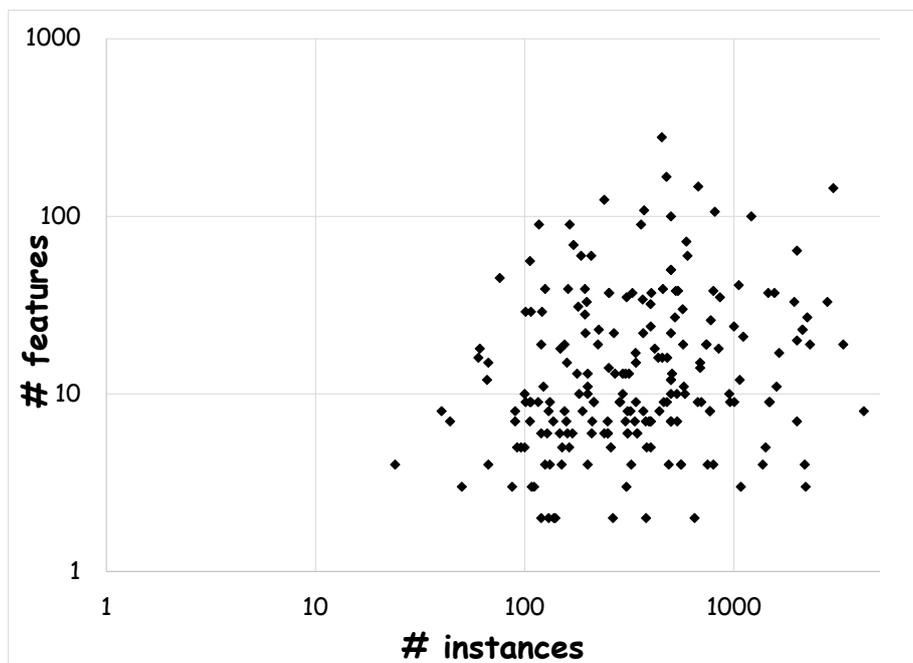


Figure 3: Datasets' dimensions.

---

<sup>2</sup>All datasets are merged in <https://bit.ly/3o050op>

<sup>3</sup><https://www.kaggle.com>

<sup>4</sup><https://sci2s.ugr.es/keel/datasets.php>

<sup>5</sup><https://www.openml.org>

<sup>6</sup><https://archive.ics.uci.edu/ml/datasets.php>

### 4.3. Measures

Since our core idea is to recommend high-performing algorithms for a given combination of dataset and evaluation measure, we use the mean reciprocal rank (MRR) measure. The MRR is a statistical measure used to evaluate the rank of the first correct recommendation:

$$MRR = \frac{1}{|D|} \sum_{i \in D} \frac{1}{rank_i} \quad (4)$$

where  $D$  refers to the number of datasets evaluated and  $rank_i$  represents the ranking of the algorithm with the top-performance for the  $i$ -th dataset. The MRR assumes values over the range  $[0,1]$ , where one indicates that the top-performing algorithm was recommended. By using this measure, we can determine the average ranking of the first correct recommendation.

Additionally, in order to estimate the quality of the algorithms' recommended list, the commonly used measure Spearman's rank correlation coefficient (SRC) is used. Given the actual ranking  $a = (a_1, \dots, a_n)$  and the predicted ranking  $p = (p_1, \dots, p_n)$ , the SRC is used to evaluate the similarity between these ranked lists. The SRC measure is defined as follows:

$$SRC(a, p) = 1 - \frac{6 \sum_{i=1}^n (a_i - p_i)^2}{n^3 - n} \quad (5)$$

where  $n$  is the number of candidate algorithms. The SRC value ranges from  $[-1,1]$ . The larger the value, the greater the similarity between the actual and predicted ranking. This measure has been used in previous meta-learning studies [11, 12, 13] for assessing the degree of agreement between the actual and recommended lists.

#### 4.3.1. Clustering algorithms

In this paper, 13 widely used clustering algorithms are evaluated on a diverse number of datasets.<sup>7</sup> These algorithms have been chosen to provide a wide range of analyses from different perspectives. The algorithms selected represent various clustering algorithm categories, as seen in Table 5. The clustering algorithms evaluated are:

**1) Evolutionary algorithm for clustering (EAC)** is a genetic algorithm, which is capable of automatically finding the optimal number of clusters for a given dataset [32]. The solution quality (fitness) is evaluated by using the silhouette metric.

**2) Particle swarm optimization for clustering (PSC)** is a biologically-inspired algorithm motivated by an analogy to a flock of birds [33]. The algorithm maintains a set of potential solutions, i.e., particles, where each particle represents a solution to an optimization problem. For clustering, a particle represents a potential cluster's center. The particles move in the search space and are ultimately positioned and divided by the natural groups of data. The number of clusters is an input parameter.

**3) Minimum spanning tree (MST)** is used to successfully detect clusters of a heterogeneous nature [34]. Given a dataset, the algorithm generates a complete graph  $G$  of

---

<sup>7</sup>The implementation of several algorithms and several clustering internal measures are taken from <https://github.com/ItayGabbay/ClusteringAlgorithmSelection>.

the dataset. Then, an MST is constructed from  $G$ . By removing the edges that satisfy a predefined inconsistency criterion, a solution with  $k$  clusters is produced.

**Hierarchical agglomerative clustering:** This is a bottom-up approach, which generates a series of models with a number of clusters from  $n$  (each data point is an individual cluster) to one (all of the data points in one cluster) [35]. In each step, the approach merges the pair of clusters that minimally increases a given linkage distance. The linkage criterion determines which distance should be used between data point sets. Methods 3, 4, 5, and 6 are examples of algorithms with different linkage criteria.

**4) Agglomerative single-linkage (SL)** merges the two clusters with the minimal pairwise distance [36]. A heuristic is used to determine the number of clusters. During the merging process, the silhouette [37] value is calculated for every partition achieved, and the one with the maximum value is the best solution.

**5) Agglomerative average-linkage (AL)** combines the clusters  $C_i$  and  $C_j$  with the minimal average distance between pair of points, where one point is from cluster  $C_i$ , and the other point is from cluster  $C_j$ .

**6) Agglomerative complete-linkage (CL)** links the two clusters with the shortest distance between the points farthest from each cluster, i.e., with the smallest diameter [38].

**7) Agglomerative ward-linkage (WL)** finds the pair of clusters that lead to the minimal increase in the variance after merging.

**8) K-means (KM)** is the most commonly used simple clustering method [39]. The algorithm clusters data points into a predefined number of groups based on the similarities between them. This technique is sensitive to the initialization of the clusters' centers.

**9) K-harmonic means (KHM)** is a technique that overcomes the K-means method's problem regarding the initialization sensitivity. Using the harmonic mean, the algorithm defines the clusters' centers [40]. Thus, the solution provided is independent of initialization of the clusters' centers. The number of clusters is an input parameter.

**10) Kernel K-means (KKM)** is an algorithm that follows the same procedure as the KM, except for the distance calculation method, which differs [41]. A kernel method is used instead of the Euclidean distance to find clusters that are nonlinearly separable in the input space.

**11) Mini batch K-means (MBK)** is a variant of the KM algorithm, which utilizes mini batches to improve the algorithm's efficiency in terms of computation time.

**12) Fuzzy C-means (FC)** allows each data point to belong to multiple clusters by assigning a membership score to each data point that corresponds to each cluster's center. The membership score  $M_{i,C_j}$  is determined on the basis of the distance between point  $i$  to cluster center  $C_j$ . The closer the data point is to the cluster's center, the greater its membership score for the particular cluster center [42].

**13) Density-based spatial clustering applications with noise (DBSCAN)** is an algorithm which effectively discovers clusters with different shapes; it also deals with noise and outliers [43]. The solution is produced by combining dense areas separated by regions of sparse areas. A distance threshold  $Eps$  is an input parameter. By using a heuristic which defines a small value for  $Eps$  and increasing it by 10% in each iteration, we achieve a partition where the outliers are less than 10% of the data.

The following algorithms: PSC, AL, CL, WL, KM, KHM, KKM, MBK, and FC require knowledge of the number of clusters ( $K$ ) in advance. As done in a prior study [12], by using all of the internal measures presented in the subsection that follows, we evaluate the solutions of the four remaining algorithms that don't require the value of the parameter  $K$  in advance. Then, based on the number of clusters in the best partitioning solution, we define the value of  $K$ .

Category	Algorithms
Bio-inspired	EAC and PSC
Graph-based	MST
Hierarchical	SL, AL, CL, WL
Partitional	KM, KHM, KKM, MBK
Fuzzy	FC
Density-based	DBSCAN

Table 5: The clustering algorithm categories evaluated.

#### 4.3.2. Internal clustering evaluation indices

Since clustering is an unsupervised task, most of the relevant problems do not maintain a priori knowledge about the solution of a given clustering problem. Thus, in this paper, we chose 10 widely used internal measures [44] which represent different aspects such as cluster compactness and cluster separation.

As mentioned above (subsection 2.2.1), some internal measures follow the notions of inter/intra cluster measures. While, intra-cluster measures assess cluster compactness, inter-cluster measures assess the quality of the separation between clusters. There are several definitions of inter/intra measures available. In this work, we chose the largest diameter of a cluster as the intra-cluster measure and the sum of pairwise distances between data points from two different clusters as the inter-cluster measure. All of the indices use the *Euclidean* distance between data points.

The indices are:

1) **Davies-Bouldin** [45] is a function of the average similarity between each cluster and its most similar one. In the context of this index, the similarity is defined as a measure that balances intra-cluster scatter against inter-cluster separation. The better the clusters, the less the value of the index.

2) **Calinski-Harabasz** [46], also known as the *variance ratio criterion*, is defined as the ratio of between-cluster dispersion and inter-cluster dispersion for all clusters. The higher the score, the better the clusters' quality.

3) **Bezdek-Pal** [47] is an average value of all of the inter-cluster distances. The better the partition, the higher the value of the index.

4) **Dunn index** [48] computes the ratio between the smallest separation value and the largest compactness value. Maximizing this ratio leads to a better solution.

5) **Silhouette score** [49] is a measure of how similar a data point is to the cluster it belongs to, compared to its similarity to other clusters. The best value is 1 and the worst

value is -1. A high value implies that the data point is well matched to its own cluster, whereas a value close to -1 indicates that the point is assigned to the wrong cluster.

6) **Milligan-Cooper** [50] is a maximization criterion based on the point biserial index, which is a statistical correlation measure between continuous and binary variables. For each pair of points, a point biserial correlation is calculated between the corresponding values in the distance matrix and a dummy variable which indicates whether or not they were assigned to the same cluster. A value of zero is assigned if the two corresponding points are clustered together by the algorithm, otherwise a value of one is assigned.

7) **Handl-Knowles-Kell** [51] assesses how well a given clustering solution follows the idea of grouping neighboring data points together, into the same cluster. The value of the index increases when there are differences in the clustering of some data point and the clustering of its neighbors.

8) **Hubert-Levin** [52] evaluates whether similar data points share the same cluster and whether data points with a large distance between them are allocated to different clusters. Clustering quality increases when the value of the index decreases.

9) **SD-Scat** [53] measures the average compactness of clusters by computing the scattering within clusters. A small value indicates compact clusters.

10) **Xie-Beni** [54] is defined as the ratio of the overall variation to the smallest distance between the clusters. When the data has been appropriately clustered, the index value should be low.

Table 6 presents the internal indices, their respective domains, objectives, and mathematical formulations. We use those algorithms and indices to create the meta-knowledge.

#### 4.4. Experimental setup

We used the following setup in all of our experiments:

1. We used DeepWalk’s default parameters for a weighted graph to create the feature matrix  $X$  described in subsection 3.3.3: number-walks = 10, representation-size = 64, walk-length = 40, window-size = 5.
2. We used the Deep Graph Library (DGL) [55] to build the GCNN models (average ranking model and the 10 individual models for each internal measure). Every model consists of four graph convolution layers.
3. We train all GCNN models for a maximum of 50 epochs (training iterations) using the Adam optimizer with a learning rate of 0.006. We stop training if the loss does not decrease for 10 consecutive epochs.
4. We set the embedding dimensions for each dataset in every model to 300.
5. The values of the learning rate, number of graph convolutional layers, and embedding size were determined in a preliminary experiment and were fixed for all datasets.<sup>8</sup>

---

<sup>8</sup>Learning rate of {0.001, 0.002, 0.003, 0.004, 0.005, 0.006, 0.01}, number of graph convolutional layers {2, 3, 4, 5, 6}, and embedding dimensions of {50, 100, 200, 300, 400, 500} were tested, and respectively 0.006, 4, 300 were found to produce the best results with reasonable efficiency across all models

Index	Score Domain	Objective	Mathematical Formulation
Bezdek-Pal	$[0, \infty]$	Max	$\sum_{i=1}^{NC} \sum_{j=i+1}^{NC} \frac{\sum_{x \in C_i, y \in C_j} d(x, y)}{ n_i   n_j }$
Dunn index	$[0, \infty]$	Max	$\min_i \{ \min_j (\frac{\min_{x \in C_i, y \in C_j} d(x, y)}{\max_k \{ \max_{x, y \in C_k} d(x, y) \}}) \}$
Calinski-Harabasz	$[0, \infty]$	Max	$\frac{\sum_i n_i d^2(c_i, c) / (NC - 1)}{\sum_i \sum_{x \in C_i} d^2(x, c_i) / (n - NC)}$
Silhouette score	$[-1, 1]$	Max	$\frac{1}{NC} \sum_i \{ \frac{1}{n_i} \sum_{x \in C_i} \frac{b(x) - a(x)}{\max[b(x), a(x)]} \}$
Milligan-Cooper	$[-1, 1]$	Max	$\frac{(\sum_{i=1}^{NC} \sum_{j=i+1}^{NC} \sum_{x \in C_i, y \in C_j} d(x, y) - \sum_{i=1}^{NC} \sum_{x, y \in C_i, l < m} d(x_l, y_m)) \sqrt{\frac{n_w n_b}{n_t^2}}}{n_b}$
Davies-Bouldin	$[0, \infty]$	Min	$\frac{1}{NC} \sum_i \max_{j, j \neq i} \{ \frac{\frac{1}{n_i} \sum_{x \in C_i} d(x, c_i) + \frac{1}{n_j} \sum_{x \in C_j} d(x, c_j)}{d(c_i, c_j)} \}$
Handl-Knowles-Kell	$[0, \infty]$	Min	$\sum_{i=1}^n \sum_{j=1}^L x_{i, n_{n_i(j)}}, x_{i, m_{i(j)}} = 0$ if $i$ and $j$ are in the same cluster and $\frac{1}{j}$ otherwise
Hubert-Levin	$[0, 1]$	Min	$\frac{\sum_{i=1}^{NC} \sum_{x, y \in C_i, l < m} d(x_l, y_m) - S_{min}}{S_{max} - S_{min}}, S_{min} \neq S_{max}$
SD-Scat	$[0, \infty]$	Min	$\frac{1}{NC} \sum_i \frac{\ \sigma(C_i)\ }{\ \sigma(D)\ }$
Xie-Beni	$[0, \infty]$	Min	$\frac{\sum_i \sum_{x \in C_i} d^2(x, c_i)}{n * \min_{i, j \neq i} d^2(c_i, c_j)}$

Table 6: Description of internal indices. Mathematical symbols:  $D$ – dataset;  $n$ – number of instances in  $D$ ;  $n_t$ – number of pairs of instances in  $D$ ;  $n_w$ – number of pairs of instances belonging to the same cluster;  $n_b$ – number of pairs of instances belonging to different clusters;  $c$ – center of  $D$ ;  $NC$ – number of clusters;  $C_i$ – the  $i$ -th cluster;  $n_i$ – number of instances in  $C_i$ ;  $c_i$ – center of  $C_i$ ;  $d(x, y)$ – distance between  $x$  and  $y$ ;  $s_d$ – standard deviation of all distances;  $\sigma(C_i)$ – variance vector of  $C_i$ ;  $L$ – parameter determining the number of neighbors to be considered;  $S_{min}$ – sum of the  $x$  smallest distances in  $n_t$ ;  $S_{max}$ – sum of the  $x$  largest distances in  $n_t$ ;  $a(x)$ – average distance between the the  $x$ th sample and all other samples included in the  $i$ th cluster;  $b(x)$ – minimum average distance between the the  $x$ th sample and all of the samples clustered in  $k$ th cluster for  $k \neq i$ .

- We evaluated the performance of all of the meta-learner models using the leave-one-out procedure. For each dataset evaluated  $d_i \in D$ , we trained the ranking model using meta-features from  $d_j \in D$ , where  $i \neq j$  and  $D$  is a collection of datasets. Then,  $d_i$  is used to test the XGBoost model generated.
- We used the XGBoost algorithm to train the ranking model. We chose the objective function: 'rank:pairwise.' For each clustering measure, we set the hyperparameters based on a preliminary study. These parameters are identical for all of the datasets used and all of the methods evaluated. The hyperparameters of each model will be available in the code repository.

## 5. Evaluation results

In this section, we first present the results and an analysis of the average ranking mode. Then, we evaluate the individual model mode and discuss the results of the popularity-based baseline. Finally, we analyze both the importance of applying the PCA algorithm and MARCO-GE's sensitivity across several hyperparameters.

### 5.1. Evaluation results: average ranking model mode

The three meta-learning methods: distance-based, CaD, and MARCO-GE are compared with each other and with the *standard ranking* baseline. The *standard ranking* baseline

represents the average ranking over all of the training datasets. The results of our evaluation are shown in Table 7, where it is clear that MARCO-GE has both the highest average SRC and the highest average MRR over the 210 datasets evaluated. As shown in Table 7,

Measure	Standard Ranking	Distance-Based	CaD	MARCO-GE
SRC	0.608	0.620	0.608	<b>0.639</b>
MRR	0.562	0.571	0.559	<b>0.825</b>

Table 7: Average ranking model results - the average SRC and MRR values of the methods evaluated over 210 clustering datasets. The best results with statistical significance are highlighted.

MARCO-GE also outperforms the standard ranking baseline by a wide margin.

Not only did MARCO-GE suggest the most similar recommendation (with regard to the actual ranking) with an average SRC of 0.639, it also needs to sample much fewer algorithms in order to make a perfect recommendation.

We used the Friedman test to validate the statistical significance of the differences between the methods evaluated [56] for each measure separately. The null hypothesis that the four methods perform the same and the observed differences are merely random was rejected with  $p < 0.01$ . We proceeded with Wilcoxon signed-rank post-hoc tests and conclude that the differences between MARCO-GE and the other methods were found to be statistically significant with  $p < 0.01$ .

#### 5.1.1. Discussion: average ranking model results.

Additional analysis of the results presented in the previous section yielded several interesting insights about the merits of MARCO-GE over the other methods.

**MARCO-GE is more robust than the CaD and distance-based methods.** Tables 8 and 9 present the three datasets for which MARCO-GE and the other state-of-the-art methods (CaD and distance-based) have the greatest differences for the SRC measure. In each case, MARCO-GE outperforms CaD and distance-based by a significant margin. These results lead us to conclude that our method is capable of adapting in scenarios where the dataset in question has uncommon characteristics that may cause the other approaches to be ineffective (e.g., a small number of features or instances). In cases such as these, the embedding representations obtained from the transformation of datasets to graphs in our method provide better performance for the average ranking model than the predetermined meta-features that are proposed by the other leading approaches examined.

Dataset Name	Improvement in SRC	Suggested Reason
Congressional-voting	0.521	Missing values and large number of features
Rabe_266	0.308	Small number of features
calendarDOW	0.297	Large number of features

Table 8: Average ranking model results - the top-3 datasets with the greatest improvement in the SRC measure between MARCO-GE and the CaD method. Positive values indicate better performance by MARCO-GE.

Dataset Name	Improvement in SRC	Suggested Reason
Congressional-voting	0.516	Missing values and large number of features
calendarDOW	0.426	Large number of features
rmftsa_ctoarrivals	0.297	Rare dataset type in our training set + small number of features

Table 9: Average ranking model results - the top-3 datasets with the greatest improvement in the SRC measure between MARCO-GE and the distance-based method. Positive values indicate better performance by MARCO-GE.

**MARCO-GE is consistently better at identifying the optimal algorithm.** In addition to achieving the top MRR score (0.825), our approach recommended the best algorithm in the first rank position on 156 out of the 210 evaluated datasets. As shown in Table 10, this value is significantly higher than any of the other methods.

Method Name	Number of Datasets with Top Performance
distance-based	79 (37.6%)
CaD	79 (37.6%)
<b>MARCO-GE</b>	<b>156 (74.2%)</b>

Table 10: Average ranking model results - the number of datasets for each method for which the optimal algorithm is recommended. The best results are highlighted.

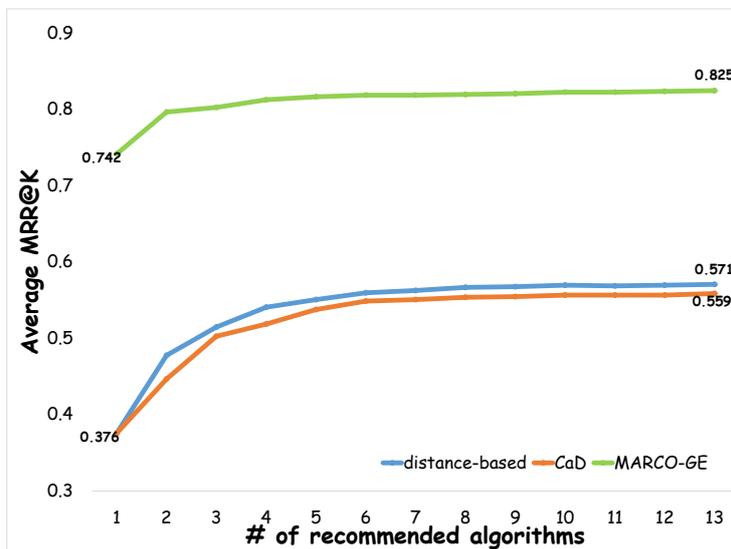


Figure 4: Average ranking model results - average MRR@K over 210 datasets obtained by distance-based, CaD and MARCO-GE vs the number of recommended algorithms.

**MARCO-GE is consistently better than the distance-based and CaD methods.** In order to determine whether the overall recommendation quality of MARCO-GE is

higher than the distance-based and CaD methods, we analyze these approaches based on their top-X ranked algorithms. In Figure 4, we present the MRR@K results when choosing the best-performing algorithm out of the top-K recommendations. While all of the methods show improved performance, MARCO-GE achieves an MRR@K greater than 0.8 after evaluating only three algorithms. In addition, it can be seen that our method converges after evaluating four algorithms, whereas the other methods converge after evaluating six algorithms. From the end user perspective, MARCO-GE has beneficial added value: to find an optimal algorithm for a given problem, fewer algorithms should be considered.

### 5.2. Evaluation results: individual model mode

In the individual model evaluation, a unique model was created for each of the 10 internal measures. The mean values of the SRC and MRR measures for each index over 210 datasets are summarized in Tables 11 and 12, respectively.

Index	Distance-Based	CaD	MARCO-GE
Bezdek-Pal	0.552	0.552	<b>0.589</b>
Dunn Index	0.558	0.563	<b>0.597</b>
Calinski-Harabasz	0.682	0.706	<b>0.733</b>
Silhouette score	0.613	0.605	<b>0.645</b>
Milligan-Cooper	0.463	0.480	<b>0.534</b>
Davies-Bouldin	0.607	0.604	<b>0.641</b>
Handl-Knowles-Kell	0.635	0.625	<b>0.682</b>
Hubert-Levin	0.482	0.464	<b>0.528</b>
SD-Scat	0.447	0.451	<b>0.504</b>
Xie-Beni	0.398	0.407	<b>0.468</b>

Table 11: Individual model results - the average SRC values of the evaluated methods over 210 clustering datasets. The best results with statistical significance are highlighted.

Index	Distance-Based	CaD	MARCO-GE
Bezdek-Pal	0.599	0.601	<b>0.759</b>
Dunn Index	0.460	0.449	<b>0.699</b>
Calinski-Harabasz	0.657	0.654	0.680
Silhouette score	0.472	0.435	<b>0.666</b>
Milligan-Cooper	0.302	0.313	<b>0.486</b>
Davies-Bouldin	0.633	0.612	<b>0.689</b>
Handl-Knowles-Kell	0.660	0.657	<b>0.818</b>
Hubert-Levin	0.425	0.367	<b>0.703</b>
SD-Scat	0.437	0.417	<b>0.805</b>
Xie-Beni	0.444	0.447	<b>0.808</b>

Table 12: Individual model results - the average MRR values of the evaluated methods over 210 clustering datasets. The best results with statistical significance are highlighted.

We used the Friedman test to validate the statistical significance of the differences between the methods evaluated [56] for the results presented in Tables 11 and 12. The null hypothesis that the three methods perform the same and the observed differences are merely random was rejected with  $p < 0.01$  for almost all models (the MRR of Davies-Bouldin was rejected with  $p < 0.02$ , and the MRR of Calinski-Harabasz was not statistically significant). We proceeded with Wilcoxon signed-rank post-hoc tests and conclude that the differences between MARCO-GE and all of the other methods were found to be statistically significant with  $p < 0.01$ .

As can be seen by the experimental results presented in Tables 11 and 12 regarding the SRC and MRR results, MARCO-GE outperforms the other methods by a significant margin for all measures, except for the MRR of the Calinski-Harabasz metric where there was no statistically significant difference. Based on these results, we can infer that our proposed graphical embedded characterization is better at (1) identifying the rankings overall (measured by the SRC), as well as (2) recommending high-performing algorithms, where the lowest position of the first candidate is among the top-2 algorithms (minimum MRR of  $\sim 0.5$ ), than the distance-based and CaD methods.

### 5.2.1. Discussion: individual model results

We compared the performance of MARCO-GE to that of the baselines (distance-based and CaD) and reached the following conclusions:

**MARCO-GE is a more robust approach.** We analyzed 10 cases in which the improvement in the SRC measure of MARCO-GE and the other methods (CaD and distance-based) were the greatest, in an attempt to identify the reasons for MARCO-GE’s superior performance. The results of our analysis of CaD and distance-based are summarized in Tables 13 and 14, respectively. It is clear that our approach is better suited for datasets with diverse properties (e.g., datasets that combine different types of features, have low/high dimensionality (features and instances), and contain missing values. These results prove that our methods also address ”challenging” and diverse datasets and are thus, more generic and robust. Furthermore, we argue that the results validate the core idea of our method: modeling the latent interactions among the instances of a dataset provides better representation for algorithm selection based on an individual measure than the predefined meta-features that are used by the CaD and distance-based methods.

Index	Dataset Name	Improvement in SRC	Suggested Reason
Milligan-Cooper	badges2	0.737	Combination of nominal and numeric features + small number of instances
SD-Scat	autoUniv-au7-500	0.724	Combination of nominal and numeric features
Bezdek-Pal	hayes-roth	0.627	Small number of instances and features
Xie-Beni	TKDSalesRegion4	0.605	Small number of instances
Dunn Index	fri_c3_500_50	0.599	Large number of features

Table 13: Individual model results - the top-5 datasets with the greatest improvement in the SRC measure between MARCO-GE and the CaD method. Positive values represent better performance by MARCO-GE.

**MARCO-GE is consistently better at recommending the top-performing algorithms.** Similar to our analysis of the average ranking model, the results presented in

Index	Dataset Name	Improvement in SRC	Suggested Reason
Xie-Beni	TKDSalesRegion4	0.833	Small number of instances
Milligan-Cooper	Echocardiogram	0.799	Missing values + combination of nominal and numeric features
SD-Scat	autoUniv-au7-500	0.798	Combination of nominal and numeric features
Calinski-Harabasz	Echocardiogram	0.755	Missing values + combination of nominal and numeric features
Dunn Index	fri_c3_500_50	0.610	Large number of features

Table 14: Individual model results - the top-5 datasets with the greatest improvement in the SRC measure between MARCO-GE and the distance-based method. Positive values represent better performance by MARCO-GE.


Table 15 demonstrate that MARCO-GE is more consistent at recommending optimal algorithms that are in first place in the ranked lists. Moreover, while both baselines were able to produce a correct recommendation for more than half of the datasets ( $>104$ ) in two indices, our method was able to do so in eight of the 10 measures evaluated.

Index	Distance-Based	CaD	MARCO-GE
Bezdek-Pal	90	89	<b>135</b>
Dunn Index	48	46	<b>121</b>
Calinski-Harabasz	122	117	<b>125</b>
Silhouette score	59	48	<b>105</b>
Milligan-Cooper	19	22	<b>46</b>
Davies-Bouldin	90	88	<b>110</b>
Handl-Knowles-Kell	122	121	<b>152</b>
Hubert-Levin	29	48	<b>104</b>
SD-Scat	51	49	<b>151</b>
Xie-Beni	53	47	<b>149</b>


Table 15: Individual model results - the number of datasets for each approach for which the optimal algorithm was recommended. The best results are highlighted.

**MARCO-GE is consistently better than the baselines.** In the previous point, we evaluated the performance of MARCO-GE and both baselines based on their top recommendation (i.e., a single algorithm). Now, we examine the overall recommendation quality by evaluating the performance of the best top-K recommended algorithms. To do so, we analyzed the MRR@K (where K is the number of recommended algorithms considered) of MARCO-GE and the compared methods on two internal measures (the silhouette score and the Milligan-Cooper index) on which our method obtained the worst results, as seen in Table 15.

The results, illustrated in Figure 5, show that MARCO-GE is consistently better than the CaD and distance-based methods. It can be observed that while the MRR@K increases with the number of recommended algorithms for all methods, MARCO-GE outperforms the other methods by a wide and significant margin. These results indicate that our method is not only more consistent in its performance but that it is also able to avoid assigning unsuitable algorithms to a given dataset.

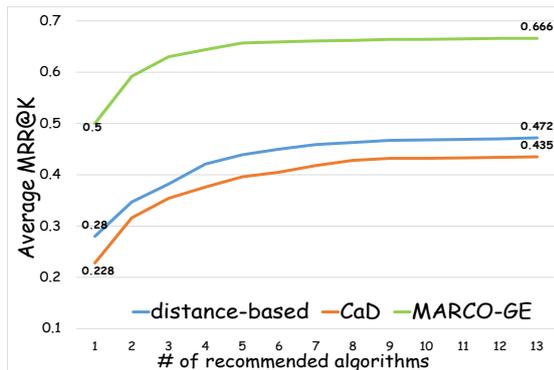

(a) Average MRR@K for silhouette index.

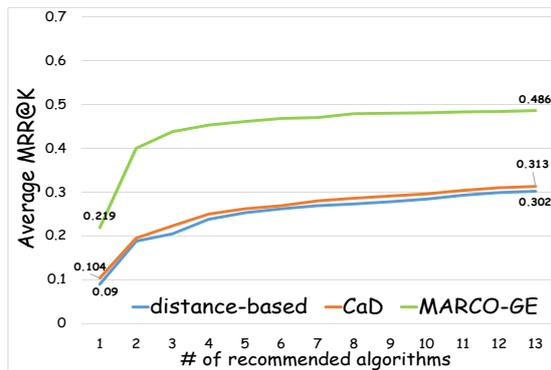

(b) Average MRR@K for Milligan-Cooper index.

Figure 5: Individual model results - the average MRR@K over 210 datasets obtained by distance-based, CaD, and MARCO-GE vs the number of recommended algorithms.

We can conclude that the ranked lists produced by MARCO-GE are effective overall, as they consist of multiple algorithms that achieve high performance for various datasets.

To summarize the last two points, we believe that the significant improvements in the MRR measure obtained by MARCO-GE derive from the supervised GCNN model used. Since the MRR measure obtains the maximum value when the best algorithm is ranked in the first position, and the GCNN model aims to detect the top-1 algorithm, the improvement in the MRR measure is more prominent than the SRC measure (20.9 % vs 4.7%, on average).

### 5.3. Popularity-based baseline

The popularity-based baseline proposed in this study is a ranking model based on the frequency of the algorithms as the best performers. The results, presented in Table 16, show

Index	Popularity-Based		Distance-Based		CaD		MARCO-GE	
	SRC	MRR	SRC	MRR	SRC	MRR	SRC	MRR
Bezdek-Pal	0.433	0.664	0.552	0.599	0.552	0.601	0.589	0.759
Dunn Index	0.386	0.510	0.558	0.460	0.563	0.449	0.597	0.699
Calinski-Harabasz	0.282	0.727	0.682	0.657	0.706	0.654	0.733	0.680
Silhouette score	0.504	0.375	0.613	0.472	0.605	0.435	0.645	0.666
Milligan-Cooper	0.291	0.455	0.463	0.302	0.480	0.313	0.534	0.486
Davies-Bouldin	0.382	0.648	0.607	0.633	0.604	0.612	0.641	0.689
Handl-Knowles-Kell	0.325	0.730	0.635	0.660	0.625	0.657	0.682	0.818
Hubert-Levin	0.312	0.390	0.482	0.425	0.464	0.367	0.528	0.703
SD-Scat	0.272	0.556	0.447	0.437	0.451	0.417	0.504	0.805
Xie-Beni	0.351	0.554	0.398	0.444	0.407	0.447	0.468	0.808
Average ranking	0.518	0.557	0.620	0.571	0.608	0.559	0.639	0.825

Table 16: The average SRC and MRR of the evaluated methods over 210 datasets and 11 clustering measures.

that MARCO-GE outperforms all of the evaluated methods, including the popularity-based

approach. However, the popularity-based method provides reasonable performance and even demonstrates better MRR results than the other state-of-the-art methods (distance-based and CaD) in eight of the 11 indices. Although the popularity-based approach does not require computational effort, except for the evaluation of clustering algorithms’ solutions, it is better at identifying the optimal algorithm.

#### 5.4. Analysis of the PCA technique’s importance

The purpose of this section is to analyze the effect of using the PCA algorithm on MARCO-GE’s performance. We conducted an ablation study with 210 datasets, using the same settings described in subsection 4.4. Table 17 presents the performance results of the *average ranking* model, with and without applying PCA.

Measure	MARCO-GE without PCA	MARCO-GE with PCA
SRC	0.618	<b>0.639</b>
MRR	0.738	<b>0.825</b>

Table 17: Average ranking model results - the average SRC and MRR values of MARCO-GE using two configurations: with PCA and without PCA method. The mean values are computed based on 210 datasets.


We used the Wilcoxon signed-rank test to validate the statistical significance of the differences between the corresponding values of SRC and MRR using two configurations: with PCA and without PCA. The null hypothesis that our method performs the same with and without PCA and the observed differences are merely random was rejected with  $p < 0.000003$  and  $p < 0.000006$  for the SRC and MRR measures, respectively.

Based on these results, we can conclude that the PCA algorithm contributes to the predictive performance of the proposed method. Moreover, the PCA algorithm enables MARCO-GE to focus on the most informative edges in the graphs and disregard the remaining edges. This also results in reduced computational effort during the the embedding calculation (decreased by a factor of three).


#### 5.5. Hyperparameter sensitivity

In these experiments, we investigate the influence of the configuration of the GCNN model on MARCO-GE’s performance, in two respects: the model depth (number of graph convolutional layers) and graph embedding size. In order to evaluate how changes to the parameterization affect MARCO-GE’s performance on the clustering algorithm selection task, we examined the average ranking measure and the Bezdek-Pal internal index. For these experiments, we randomly sampled 50 of the 210 datasets and set the number of epochs to 10. Except for the hyperparameter being tested, we set all of the other parameters with the values described in subsection 4.4. We then varied the GCNN model depth from two to six layers and varied the size of the graph embedding using the following values {50, 100, 200, 300, 400, 500}. The effects of varying the embedding size and the model depth on the performance of MARCO-GE are depicted in Figure 6.


From the figures, we can observe that as the embedding size and model depth increased from 50 to 300 and from two to four, respectively, the mean values of the SRC and MRR

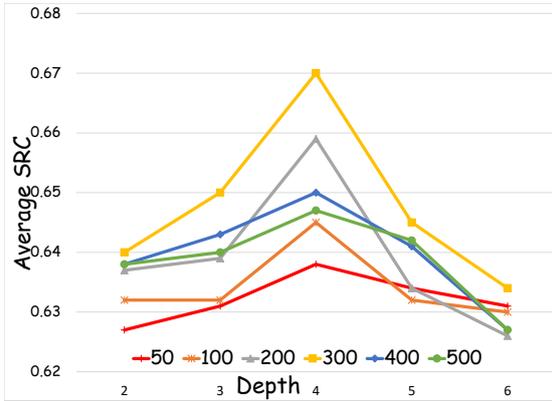


(a) Average ranking measure, SRC

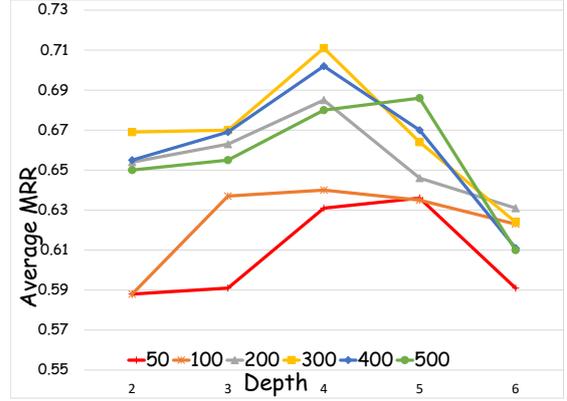

(b) Average ranking measure, MRR

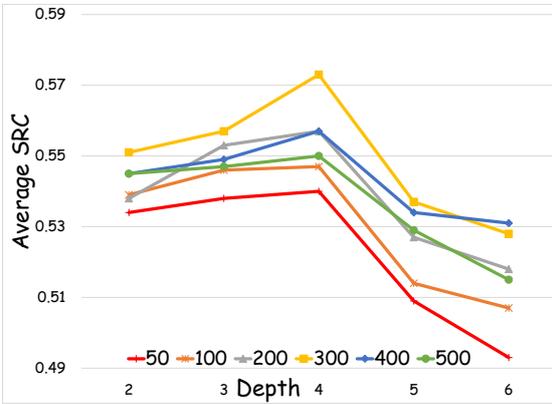

(c) Bezdek-Pal index, SRC

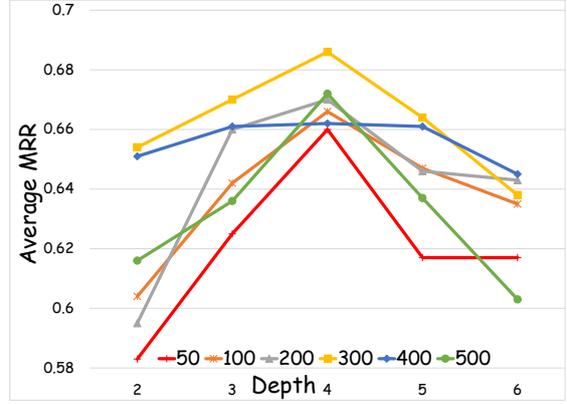

(d) Bezdek-Pal index, MRR

Figure 6: Influence of model depth (number of layers) and embedding size on MARCO-GE’s performance. We present the SRC and MRR results for both the average ranking measure and the Bezdek-Pal index.

also increase, attaining their maximum from a four-layer model and an embedding size of 300. In addition, in most cases, we can see that: (1) both of these parameters have relatively high impact on MARCO-GE’s performance, (2) the performance of our method degrades if the model is deeper than four layers, (3) our method obtains better results when utilizing high-dimensional vectors (300, 400, 500) than using low-dimensional vectors (50, 100), (4) using an embedding size of 300, the SRC measure achieved the best results for all depths, except for a depth of six, as seen in Figure 6c, and (5) the best results for the MRR measure are obtained by using an embedding size of 300 and a depth smaller than five.

## 6. Conclusions and future work

In this study, we introduced MARCO-GE, a meta-learning method aimed at recommending the best clustering algorithms for a given dataset and evaluation measure. By modeling the interactions of the dataset’s instances as a graph and extracting an embedding representation that serves the same function as meta-features, we were able to develop a meta-learning model capable of effectively recommending top-performing algorithms for previously unseen datasets. Our proposed approach outperforms leading existing solutions such as the CaD and distance-based methods, while also proving itself highly effective with ”challenging” datasets (e.g., those with high-dimensionality) and on the task of identifying the optimal algorithm in the first rank position.

For future work, new meta-features representing additional elements of the datasets can be extracted from the graphical representation of the dataset. In addition, the robustness of the meta-model can be improved by including more datasets. Finally, enabling MARCO-GE to recommend both algorithms and hyperparameter configurations could enhance the capabilities of our method.

## 7. Acknowledgments

This research was partially supported by the Israel’s Council for Higher Education (CHE) via the Data Science Research Center at Ben-Gurion University of the Negev, Israel.

## References

- [1] G. Gan, C. Ma, J. Wu, Data clustering: theory, algorithms, and applications, SIAM, 2007.
- [2] E. R. Hruschka, R. J. Campello, A. A. Freitas, et al., A survey of evolutionary algorithms for clustering, *IEEE Transactions on Systems, Man, and Cybernetics, Part C (Applications and Reviews)* 39 (2) (2009) 133–155.
- [3] D. Zakrzewska, J. Murlewski, Clustering algorithms for bank customer segmentation, in: 5th International Conference on Intelligent Systems Design and Applications (ISDA’05), IEEE, 2005, pp. 197–202.
- [4] M. Feurer, A. Klein, K. Eggensperger, J. Springenberg, M. Blum, F. Hutter, Efficient and robust automated machine learning, in: *Advances in neural information processing systems*, 2015, pp. 2962–2970.
- [5] C. Thornton, F. Hutter, H. H. Hoos, K. Leyton-Brown, Auto-weka: Combined selection and hyperparameter optimization of classification algorithms, in: *Proceedings of the 19th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2013, pp. 847–855.
- [6] I. Drori, Y. Krishnamurthy, R. Rampin, R. Lourenço, J. Ono, K. Cho, C. Silva, J. Freire, Alphas3m: Machine learning pipeline synthesis, in: *AutoML Workshop at ICML*, 2018.
- [7] S. N. das Dôres, L. Alves, D. D. Ruiz, R. C. Barros, A meta-learning framework for algorithm recommendation in software fault prediction, in: *Proceedings of the 31st Annual ACM Symposium on Applied Computing*, 2016, pp. 1486–1491.
- [8] P. Ridd, C. G. Giraud-Carrier, Using metalearning to predict when parameter optimization is likely to improve classification accuracy., in: *MetaSel@ ECAI*, 2014, pp. 18–23.
- [9] N. Cohen-Shapira, . Rokach, B. Shapira, G. Katz, R. Vainshtein, Autogrd: Model recommendation through graphical dataset representation, in: *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, 2019, pp. 821–830.
- [10] P. B. Brazdil, C. Soares, J. P. Da Costa, Ranking learning algorithms: Using ibl and meta-learning on accuracy and time results, *Machine Learning* 50 (3) (2003) 251–277.

- [11] M. C. De Souto, R. B. Prudencio, R. G. Soares, D. S. De Araujo, I. G. Costa, T. B. Ludermir, A. Schliep, Ranking and selecting clustering algorithms using a meta-learning approach, in: 2008 IEEE International Joint Conference on Neural Networks, 2008, pp. 3729–3735.
- [12] D. G. Ferrari, L. N. De Castro, Clustering algorithm selection by meta-learning systems: A new distance-based problem characterization and ranking combination methods, *Information Sciences* 301 (2015) 181–194.
- [13] B. A. Pimentel, A. C. de Carvalho, A new data characterization for selecting clustering algorithms using meta-learning, *Information Sciences* 477 (2019) 203–219.
- [14] M. A. Muñoz, Y. Sun, M. Kirley, S. K. Halgamuge, Algorithm selection for black-box continuous optimization problems: A survey on methods and challenges, *Inf. Sci.* 317 (2015) 224–245.
- [15] P. Brazdil, C. G. Carrier, C. Soares, R. Vilalta, *Metalearning: Applications to data mining*, Springer Science & Business Media, 2008.
- [16] Y. Peng, P. A. Flach, C. Soares, P. Brazdil, Improved dataset characterisation for meta-learning, in: International Conference on Discovery Science, Springer, 2002, pp. 141–152.
- [17] H. Bensusan, C. Giraud-Carrier, Discovering task neighbourhoods through landmark learning performances, in: European Conference on Principles of Data Mining and Knowledge Discovery, Springer, 2000, pp. 325–330.
- [18] M. Vukicevic, S. Radovanovic, B. Delibasic, M. Suknovic, Extending meta-learning framework for clustering gene expression data with component-based algorithm design and internal evaluation measures, *International Journal of Data Mining and Bioinformatics* 14 (2) (2016) 101–119.
- [19] D. Dua, C. Graff, UCI machine learning repository (2017).  
URL <http://archive.ics.uci.edu/ml>
- [20] P. Goyal, E. Ferrara, Graph embedding techniques, applications, and performance: A survey, *Knowledge-Based Systems* 151 (2018) 78–94.
- [21] M. Defferrard, X. Bresson, P. Vandergheynst, Convolutional neural networks on graphs with fast localized spectral filtering.
- [22] M. Niepert, M. Ahmed, K. Kutzkov, Learning convolutional neural networks for graphs, in: International conference on machine learning, 2016, pp. 2014–2023.
- [23] R. Cañamares, P. Castells, Should i follow the crowd? a probabilistic analysis of the effectiveness of popularity in recommender systems, SIGIR '18, Association for Computing Machinery, New York, NY, USA, 2018, p. 415–424. doi:10.1145/3209978.3210014.  
URL <https://doi.org/10.1145/3209978.3210014>
- [24] V. W. Anelli, T. Di Noia, E. Di Sciascio, A. Ragone, J. Trotta, Local popularity and time in top-n recommendation, in: *Advances in Information Retrieval*, Springer International Publishing, Cham, 2019, pp. 861–868.
- [25] S. García, J. Luengo, F. Herrera, *Data preprocessing in data mining*, Springer, 2015.
- [26] G. H. Dunteman, *Principal components analysis*, no. 69, Sage, 1989.
- [27] U. Von Luxburg, A tutorial on spectral clustering, *Statistics and computing* 17 (4) (2007) 395–416.
- [28] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, S. Y. Philip, A comprehensive survey on graph neural networks, *IEEE Transactions on Neural Networks and Learning Systems*.
- [29] T. N. Kipf, M. Welling, Semi-supervised classification with graph convolutional networks, arXiv preprint arXiv:1609.02907.
- [30] B. Perozzi, R. Al-Rfou, S. Skiena, Deepwalk: Online learning of social representations, in: *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2014, pp. 701–710.
- [31] T. Chen, C. Guestrin, Xgboost: A scalable tree boosting system, in: *Proceedings of the 22nd acm sigkdd international conference on knowledge discovery and data mining*, 2016, pp. 785–794.
- [32] V. S. Alves, R. J. Campello, E. R. Hruschka, Towards a fast evolutionary algorithm for clustering, in: *2006 IEEE International Conference on Evolutionary Computation*, IEEE, 2006, pp. 1776–1783.
- [33] D. Van der Merwe, A. P. Engelbrecht, Data clustering using particle swarm optimization, in: *The 2003 Congress on Evolutionary Computation*, 2003. CEC'03., Vol. 1, IEEE, 2003, pp. 215–220.

- [34] O. Grygorash, Y. Zhou, Z. Jorgensen, Minimum spanning tree based clustering algorithms, in: 2006 18th IEEE International Conference on Tools with Artificial Intelligence (ICTAI'06), 2006, pp. 73–81.
- [35] F. Murtagh, P. Contreras, Algorithms for hierarchical clustering: an overview, *Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery* 2 (1) (2012) 86–97.
- [36] R. Xu, D. Wunsch, Survey of clustering algorithms, *IEEE Transactions on neural networks* 16 (3) (2005) 645–678.
- [37] E. R. Hruschka, R. J. Campello, L. N. De Castro, Evolving clusters in gene-expression data, *Information Sciences* 176 (13) (2006) 1898–1927.
- [38] D. Defays, An efficient algorithm for a complete link method, *The Computer Journal* 20 (4) (1977) 364–366.
- [39] A. K. Jain, Data clustering: 50 years beyond k-means, *Pattern recognition letters* 31 (8) (2010) 651–666.
- [40] B. Zhang, M. Hsu, U. Dayal, K-harmonic means—a spatial clustering algorithm with boosting, in: *International Workshop on Temporal, Spatial, and Spatio-Temporal Data Mining*, Springer, 2000, pp. 31–45.
- [41] I. S. Dhillon, Y. Guan, B. Kulis, Kernel k-means: spectral clustering and normalized cuts, in: *Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining*, 2004, pp. 551–556.
- [42] Y. Man, I. Gath, Detection and separation of ring-shaped clusters using fuzzy clustering, *IEEE transactions on pattern analysis and machine intelligence* 16 (8) (1994) 855–861.
- [43] M. Ester, H. Kriegel, J. Sander, X. Xu, et al., A density-based algorithm for discovering clusters in large spatial databases with noise., in: *Kdd*, Vol. 96, 1996, pp. 226–231.
- [44] Y. Liu, Z. Li, H. Xiong, X. Gao, J. Wu, Understanding of internal clustering validation measures, in: *2010 IEEE International Conference on Data Mining*, IEEE, 2010, pp. 911–916.
- [45] D. L. Davies, D. W. Bouldin, A cluster separation measure, *IEEE transactions on pattern analysis and machine intelligence* (2) (1979) 224–227.
- [46] T. Caliński, J. Harabasz, A dendrite method for cluster analysis, *Communications in Statistics-theory and Methods* 3 (1) (1974) 1–27.
- [47] J. C. Bezdek, N. R. Pal, Some new indexes of cluster validity, *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)* 28 (3) (1998) 301–315.
- [48] J. C. Dunn, A fuzzy relative of the isodata process and its use in detecting compact well-separated clusters.
- [49] P. J. Rousseeuw, Silhouettes: a graphical aid to the interpretation and validation of cluster analysis, *Journal of computational and applied mathematics* 20 (1987) 53–65.
- [50] G. W. Milligan, M. C. Cooper, An examination of procedures for determining the number of clusters in a data set, *Psychometrika* 50 (2) (1985) 159–179.
- [51] J. Handl, J. Knowles, D. B. Kell, Computational cluster validation in post-genomic data analysis, *Bioinformatics* 21 (15) (2005) 3201–3212.
- [52] L. J. Hubert, J. R. Levin, A general statistical framework for assessing categorical clustering in free recall., *Psychological bulletin* 83 (6) (1976) 1072.
- [53] M. Halkidi, Y. Batistakis, M. Vazirgiannis, On clustering validation techniques, *Journal of intelligent information systems* 17 (2-3) (2001) 107–145.
- [54] X. L. Xie, G. Beni, A validity measure for fuzzy clustering, *IEEE Transactions on pattern analysis and machine intelligence* 13 (8) (1991) 841–847.
- [55] M. Wang, L. Yu, D. Zheng, Q. Gan, Y. Gai, Z. Ye, M. Li, J. Zhou, Q. Huang, C. Ma, et al., Deep graph library: Towards efficient and scalable deep learning on graphs, *arXiv preprint arXiv:1909.01315*.
- [56] J. Demšar, Statistical comparisons of classifiers over multiple data sets, *Journal of Machine learning research* 7 (Jan) (2006) 1–30.